

BEAVER SAW170 Eco

Hand Held Circular Saw

BEAVER SAW170E Eco



1 Maximum cut - ϕ 170mm
Ultra-Lightweight body - only 5.8kg.



2 Electronic Speed Control maintains constant speed under load for smooth cutting. (170E only Eco)




3 Blade Speed Control helps extend the life of the blade especially for Stainless steel pipe cutting. (170E only Eco)



Steel pipe,
Copper pipe,
Cast-iron pipe,
Stainless steel pipe,
Plastic pipe, etc.

REASONS TO CHOOSE BEAVER SAW.


1 Large Capacity with Lightweight, Compact design.

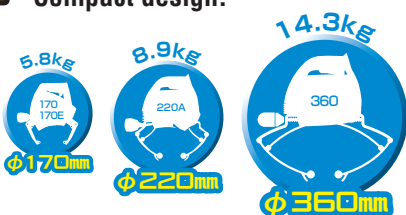

Cuts heavy pipe easily. No need to move the pipe.



2 Cutting Speed.

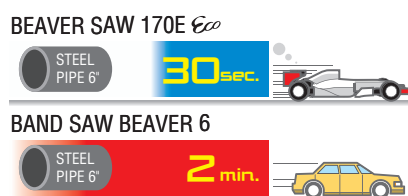

Cutting speed is faster than angle-grinder, band saw or gas cutting.



3 Cut's Square.



Straight cut and fine edges are immediately ready for joints, or welding.



BEAVER SAW 170 Eco

Code No. EX170

φ15~170mm



Double Insulation

Range of use	φ 15mm~170mm
Max. pipe wall thickness	steel : 6mm, stainless : 2mm, plastics : 14mm
Motor	220-230V 900W
Intermittent operation	25%
Blade Speed	4000rpm (No load)
Weight	5.8kg
Dimensions	(L)300×(W)220×(H)240mm
Standard Accessories	Carrying Case, TCT Blade B140, Cutting Supports x4, Hex Socket Key 2mm, 5mm, Safety Glasses, Operating Instructions

BEAVER SAW 170E Eco

Code No. EX170E

(with Electronic Speed Controller)

φ15~170mm



Double Insulation

Range of use	φ 15mm~170mm
Max. pipe wall thickness	steel : 8mm, stainless : 6mm, plastics : 14mm
Motor	220-230V 1200W
Intermittent operation	25%
Blade Speed	1600-3500rpm (No load) ※variable speed
Weight	5.8kg
Dimensions	(L)300×(W)220×(H)240mm
Standard Accessories	Carrying Case, TCT Blade B140, Cutting Supports x4, Hex Socket Key 2mm, 5mm, Safety Glasses, Operating Instructions

BEAVER SAW 220A

Code No. EX220A

φ15~220mm



Double Insulation

Range of use	φ 20mm~220mm
Max. pipe wall thickness	steel : 8mm, stainless : 6mm, plastics : 13mm
Motor	220-230V 1400W
Intermittent operation	25%
Blade Speed	4000rpm (No load)
Weight	8.9kg
Dimensions	(L)337×(W)225×(H)255mm
Standard Accessories	Carrying Case, TCT Blade B140, Cutting Supports x4, Hex Socket Key 2mm, 5mm, Safety Glasses, Operating Instructions

BEAVER SAW 360

Code No. EX360

φ75~360mm



Double Insulation

Range of use	φ 75mm~360mm
Max. pipe wall thickness	steel : 8mm, stainless : 6mm, plastics : 20mm
Motor	220-230V 1600W
Intermittent operation	25%
Blade Speed	4000rpm (No load)
Weight	14.3kg
Dimensions	(L)490×(W)220×(H)300mm
Standard Accessories	Carrying Case, TCT Blade B140, Cutting Supports x3, Hex Socket Key 2mm, 5mm, Safety Glasses, Operating Instructions

● Distributed by _____

Asada
ASADA CORPORATION

3-60, Kamiida, Nishi-Machi, Kita-Ku,
Nagoya, Japan 462-8551
TEL (052)-914-1206 FAX (052)-914-2011
URL <http://www.asada.co.jp> E-mail: trade@asada.co.jp



※ Specifications may be changed without notice.

PRINT No. 081100A